




- ◆ 貫穿孔徑，適合螺絲專用機搭配自動送料使用；
作動輕巧靈敏，可調整夾持力
- ◆ Through hole, suitable special purpose; can adjustment clamp force.

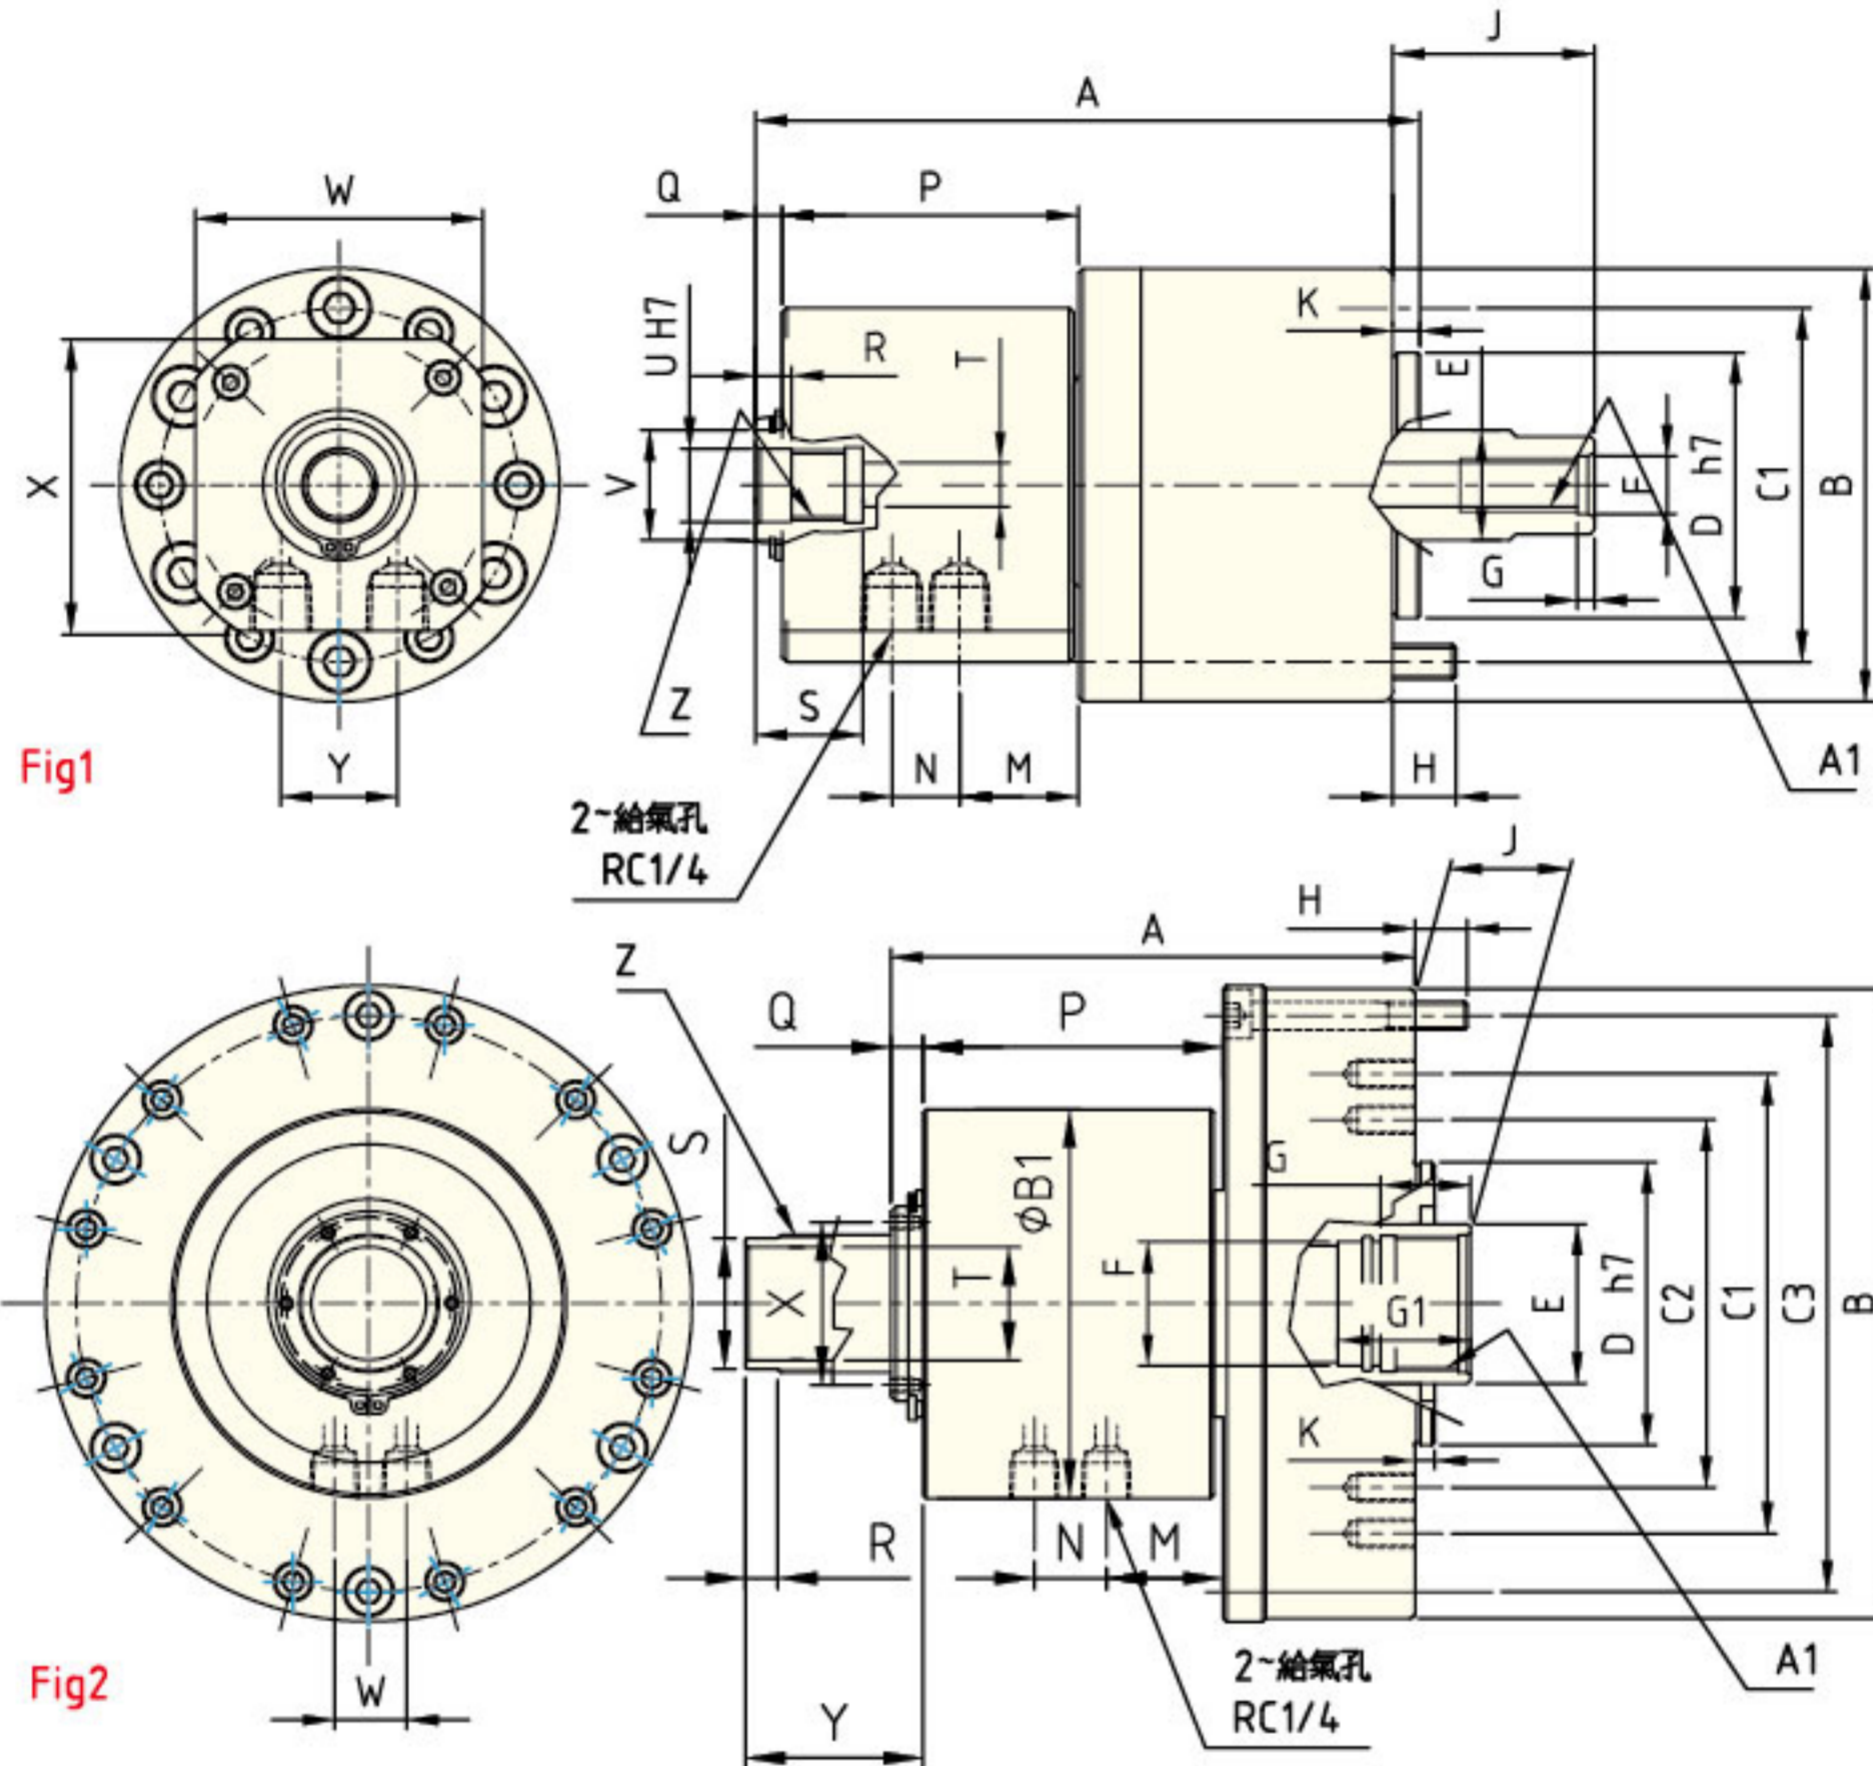

外觀尺寸 Dimensions

型號	外形尺寸		C1 p.c.d	C2 p.c.d	C3 p.c.d	D	φE	φF H8	G	G1	H	J		K	M	N	P	Q	R	S	T	U	V	W	X	Y			
	Max.	Min.										Max.	Min.																
CA-65	148	98	80	---	---	60	25	13	4	---	6-M8x60凸出 14	45	30	6	26.5	15	65	6	8	24	φ10 通孔	φ16.65	φ25	64	66	26			
CA-130N	147	165	90	---	150	65	---	17	5	---	6-M8x75凸出 14	---	---	---	24	---	66	---	---	---	---	---	---	---	---	---	---	---	---
CA-140	121.5	180	130	104	163	80	45	35	12	25	6-M8x65凸出 11	5	5	22	63	---	83.5	9	9	φ37 g7	φ32 通孔	---	---	32	46 p.c.d	49.5	44.5		
CA-170	144.5	208		---	191							15															0	32.5	20
CA-220N	151.5	258	170	92	242	130	70	57	30	42	6-M10x70凸出 18.5	18.5	5	---	31.5	---	82.5	---	---	---	---	---	---	---	---	---	---	---	

型號	外形尺寸	Z	A1	B1	Fig
CA-65	M16x1.5左牙	M12x1.75	---	---	1
CA-130N	---	M16x2	---	---	
CA-140	M39x1.5	M38x1.5	φ88	φ110	2
CA-170					
CA-220N	---	M60x2	---	---	

技術規格 Specifications

型號	外形尺寸	活塞面積(伸側) cm ² Eff. piston area	活塞面積(拉側) cm ² Eff. piston area	行程 mm Piston stroke	最高轉速 rpm Max speed	最高使用壓力 MPa Max pressure (kg/cm ²)	重量 Kg Weight
CA-65		31.2	28.3	15	9500	0.7(7)	3.2
CA-130N		130.7	127.2		5000		7
CA-140		138.0	141.4	5	4500		9
CA-170		211.0	214.4	15			13
CA-220N		340.1	347.0	5			17

註：另有無通孔型歡迎來電洽詢
註：另有注氣型及注水型供訂製