

PAC 气动起动器卡盘

Mega-Bore Pneumatic Self-Contained Chuck





- Ideal for gripping large diameter pipe
- Built-in non-return valves maintain the air pressure during machining
- Self-contained actuation eliminates the need for hydraulics

- 方便进行大贯通孔径管材料作业
- 无需额外的液压系统·可制作紧凑化的机床
- 内置锁阀

PNEUMATIC CHUCK

See page 60-67
Gripping Force

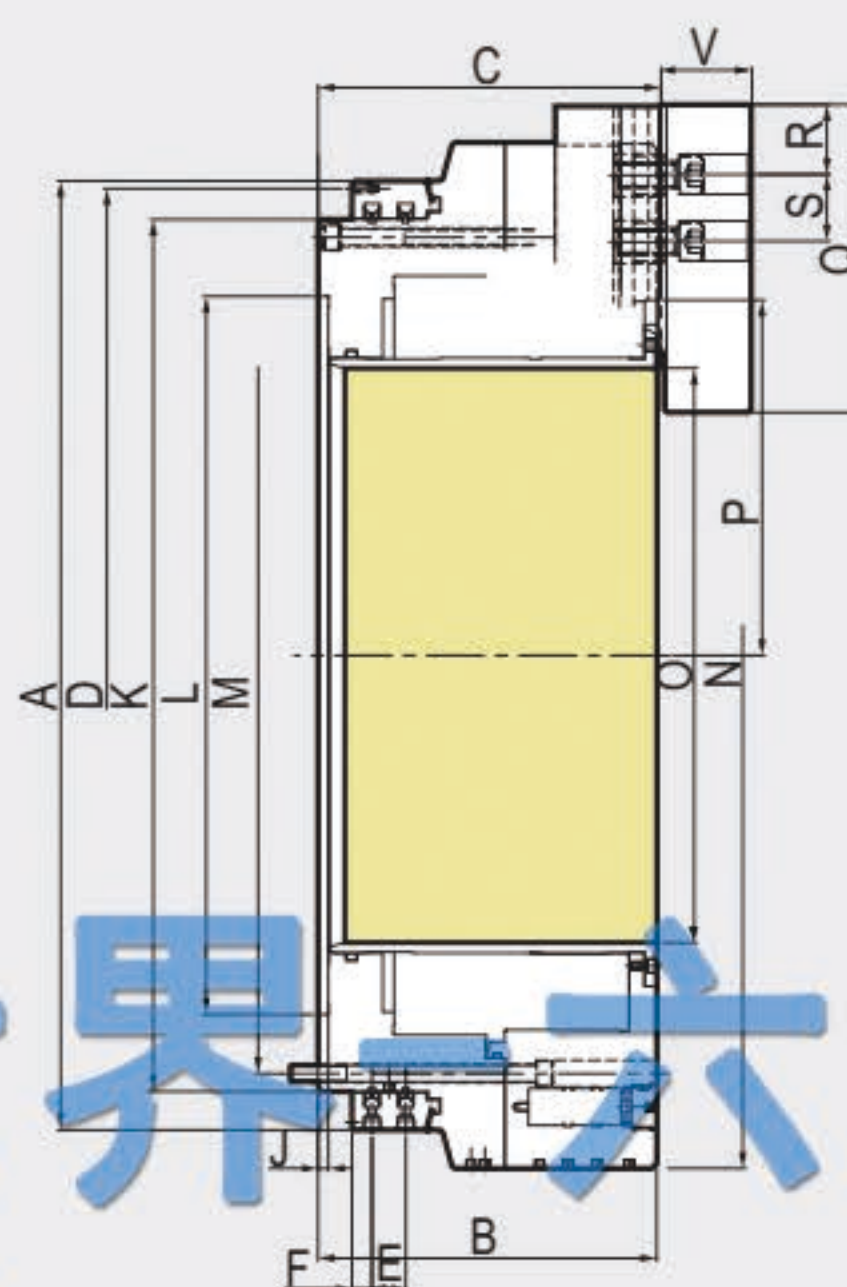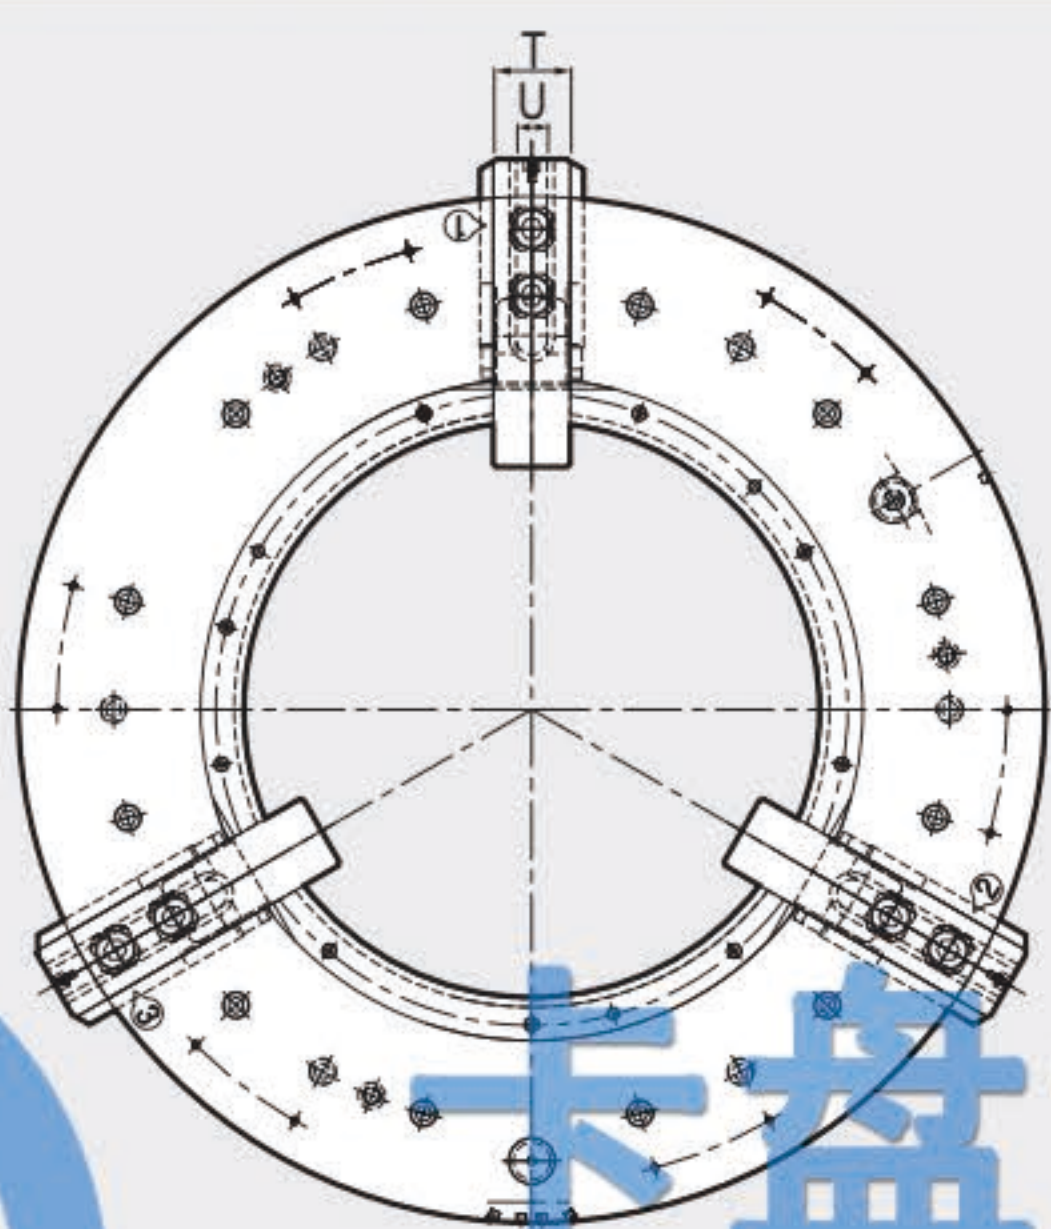

卡盘世界六欣机械
咨询热线400-688-0096



It is recommended to grease chucks at least twice a day in order to maximize longevity.
为了延长寿命 建议一天润滑2次。

Dimensions

	ΦA	B	C	ΦD	E	F	J	ΦK	ΦL	ΦM	ΦN	ΦO	P Max.	P Min.	Q	R	S	T	U	V
PAC-60275	605	280	284	585	26	17	8	535	450	808	-	275	205.9	180.5	195	37	40	60	25.5	78
PAC-63325	685	305.5	329.5	666	33	19	8	610	510	580	-	325	230.9	205.5	240	42	65	75	30	80
PAC-85375	850	352	356	830	33	19.5	8	775	700	745	-	375	268	268	300	68	65	75	30	90
PAC-10056	925	330	334	910	33	19.5	10	850	700	815	1000	560	346.3	321.1	300	68	65	75	30	88

Specifications

Type	Thru Hole Dia. 通孔直径 [mm]	Jaw Stroke Dia. 卡爪冲程直径 [mm]			Operating Pressure [Bar]	Clamping Force (6bar) 夹持力 [kN]	Max. R.P.M. 最大转速 [min-1(r.p.m.)]	Weight 重量 [Kgf]	GD ² 容许工作惯性 [N·m ² (kgf·m ²)]
		Total	Rapid	Clamp					
PAC-60275	275	25.4	16.9	8.5	2~8	180	1100	355	20.6
PAC-63325	325	25.4	16.9	8.5	2~8	280	900	505	35.1
PAC-85375	375	25.47	13.47	12	2~8	200	750	970	105
PAC-10056	560	25.4	15	10.4	2~8	280	450	960	157.6